

अनुसूची- १०

(परिच्छेद ४ को दफा ११.७ (ड) सँग सम्बन्धित)



Microscope Specification

Parts	Features
Stand	Single mold stand with anti-rust materials.
Viewing Bodies	Binocular 45 Degree inclined, 360 Degree rotatable, both eyepiece focusable, Adjustable interpupillary distance adjustable from 48 to 75 mm
Eyepiece	WF 10x/18mm with eyeguard, lockable, antifungal
Objectives	EP2 Plan infinity objectives 4x, 10x, 40x(SL) and 100X(SL,Oil), antifungal
Mechanical stage	Double plate stage 150 x 135mm, X/Y travel range 75mm x 40mm, double specimen holder.
Condenser	Sub-stage Abbe condenser NA 1.25 with aspheric lens. Iris diaphragm with blue filter
Focusing	Co-axial coarse and fine focusing on ball drive system for smooth operation
Illumination	LED illumination with variable illumination control. Up to 50000 hours of LED life. Rechargeable Battery Provide 6-8 Hours Battery Backup in case of electricity failure.
Electricals	Universal input 100V - 240V AC, 50/60Hz. Built-in voltage stabilizer
Optional accessories	Dark field kit, phase contrast kit, video adaptor, digital camera and mirror attachment

नोट: बिजुली नभएको ठाउँको हकमा सोलार बत्तीको ब्यवस्था गर्न सकिनेछ ।

Handwritten signature

Handwritten signature

Handwritten signature
डा. रेवती रमण पौडेल
सचिव


 राजनी नगरपालिका
 नगर कार्यपालिकाको कार्यालय
 राजनी, कैलाली
 सुदूरपश्चिम प्रदेश, नेपाल
 २०७३

ICE LINED REFRIGERATOR 150 LTR

SPECIFICATION AND FEATURES:

2~8°C Ice Lined Refrigerator

	MODEL	NW-YC150EW
	Cabinet Type	Chest
	External Size(W*D*H,mm)	811*775*964
	Package Size(W*D*H,mm)	875*805*1120
	NW(Kgs)	76
	Capacity(L)	150
Performance	Temperature range(°C)	2-8
	Ambient Temperature(°C)	10-43
	Cooling Performance(°C)	5
	Climate Class	SN,N,ST,T
	Controller	Microprocessor
Refrigeration	Display	Digital display
	Compressor	1pcs
	Cooling Method	Direct cooling
	Defrost Mode	Automatic
	Refrigerant	R290
Construction	Insulation Thickness	110mm
	External Material	Sprayed Steel plates
	Inner Material	Stainless steel
	Coated hanging basket	2
	Door Lock with Key	Yes
	Backup Battery	Yes
	Casters	4(2 casters with brake)
	Temperature	High/Low temperature
	Electrical	Power failure , Low battery
	System	Sensor error
Electrical	Power Supply(V/HZ)	220-240V/50Hz
	Rated Power	220w
	Power consumption	0.907 Kwh/24h
	Rated Current(A)	1.48
	Certification	CE


[Handwritten signature]

2/3/23
 21SD/SP/23
 चन्द्रदेव भट्ट
 कैलाली

PORTABLE VISUAL ARTIFICIAL INSEMINATION GUN

SPECIFICATION AND FEATURES:

Product configuration


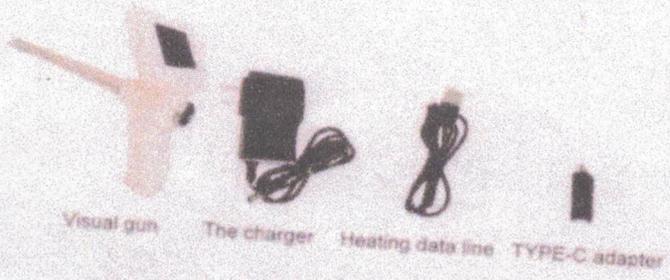


outer tube *25(Total length: 700mm)
 Sperm feeding gun *1(Total length: 700mm)

Product parameters

Parameter name	Rotary style (large)
The total length	450mm
The handle width	35mm
The length of the probe rod	350mm
The diameter of probe rod	22mm
Expansion head length	13mm
Diameter of expansion head	24mm
Air channel diameter	2.5 mm
insemination channel Diameter	11mm
Camera size	3.9 mm
The screen size	3.5"
Camera pixel	15 million pixels
Memory capacity	16g
Battery capacity	2000ma
Charger power	2A,5V
Length of insemination gun	700mm
Length of outer tube	700mm

Product introduction

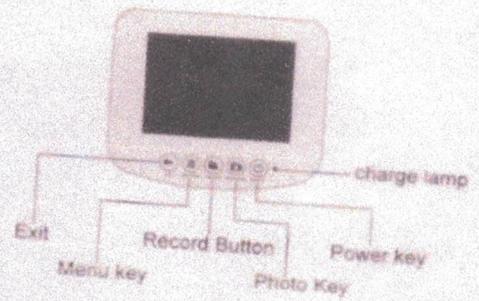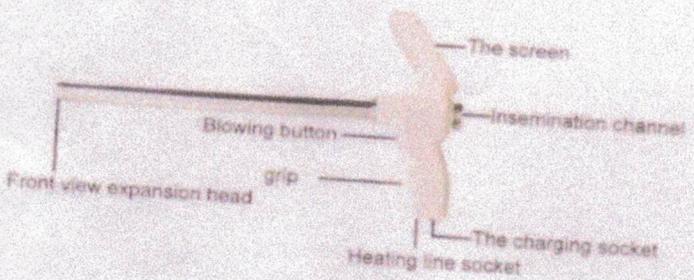

Probe rod: probe rod stainless steel material, waterproof, anti-corrosion, not rust, easy to clean, can be cleaned with disinfectant.
 Hd camera: super clear cold light source camera, can take pictures, video.
 Rod blowing function: built-in electric air pump, switch control air pump, quickly blowing away the mucus on the camera head.
 Heating socket: It can be connected to a mobile power supply to heat the probe rod to avoid discomfort to the cow's vagina during the cold winter months.

Open key: Short press to power on, long press for 3 seconds to power off.
 record button: Press [Video button] to start recording after power-on, and press again to stop recording, and the recording will be automatically stored.
 Photo button: Press the "Photo" button to automatically take photos and store them.
 Menu Key: Includes recording, taking pictures, playing back, deleting and setting.
 Return key: Returns to the previous interface.

[Handwritten signature]

[Handwritten signature]
 चन्द्रदेव भट्ट
 चिकित्सक (पशु)